

REQUEST FOR PROPOSAL

Summit County Service Area #3

Rotomillings Surfacing Project - Summer 2025



SUMMIT COUNTY SERVICE AREA #3

629 E. Parkway Drive, Suite 1

Park City, UT 84098

(435) 500-6226

Email: permit@summitcosa3ut.gov

Posted: May 14, 2025

Due: Tuesday, June 3, 2025 at 4:00pm

Summit County Service Area #3 Rotomill Millings Surfacing Project

Engineer: Gary Horton, S.E.
5/8/25

Summit County Service Area #3

Rotomill Millings Surfacing Project

Description of Work


- A. Coordinate work schedule with the Engineer to obtain, spread, and compact the rotomill millings at the locations shown in the project map, or as directed by the Engineer.
- B. Rotomill tailings will be placed on the roadways as directed by the engineer from a different project shown on the project map (next page).
- C. If millings are not placed on the roadways, obtain the millings that will be stockpiled at a few potential locations shown on the project map.
- D. Spread millings uniformly in 3 inch lifts on the routes shown in the project map.
- E. Prepare, spread and compact millings such that final surface is graded for adequate surface water runoff.
- F. Compact the entire surface of each lift of millings with at least 4 to 6 passes of a vibratory roller as verified by the engineer.

Traffic Control

- A. Half of the roadway (one lane) may be closed (for a maximum of 500' on straight roadways, 250' on curves to allow adequate vehicle site distance) while work is taking place. The length of lane closure may be adjusted with approval from the Engineer.

Bid Schedule


Bid Item Number	Bid Item Name	Est. Qty.	Unit	Unit Price	Total Cost
1	Traffic Control	1	Lump		
2	Mobilization	1	Lump		
3	Spread Millings	86,575	Sq Ft		
4	Compact Millings	86,575	Sq Ft		
5	Alternate – Haul Millings	480	Tons		
Total:					

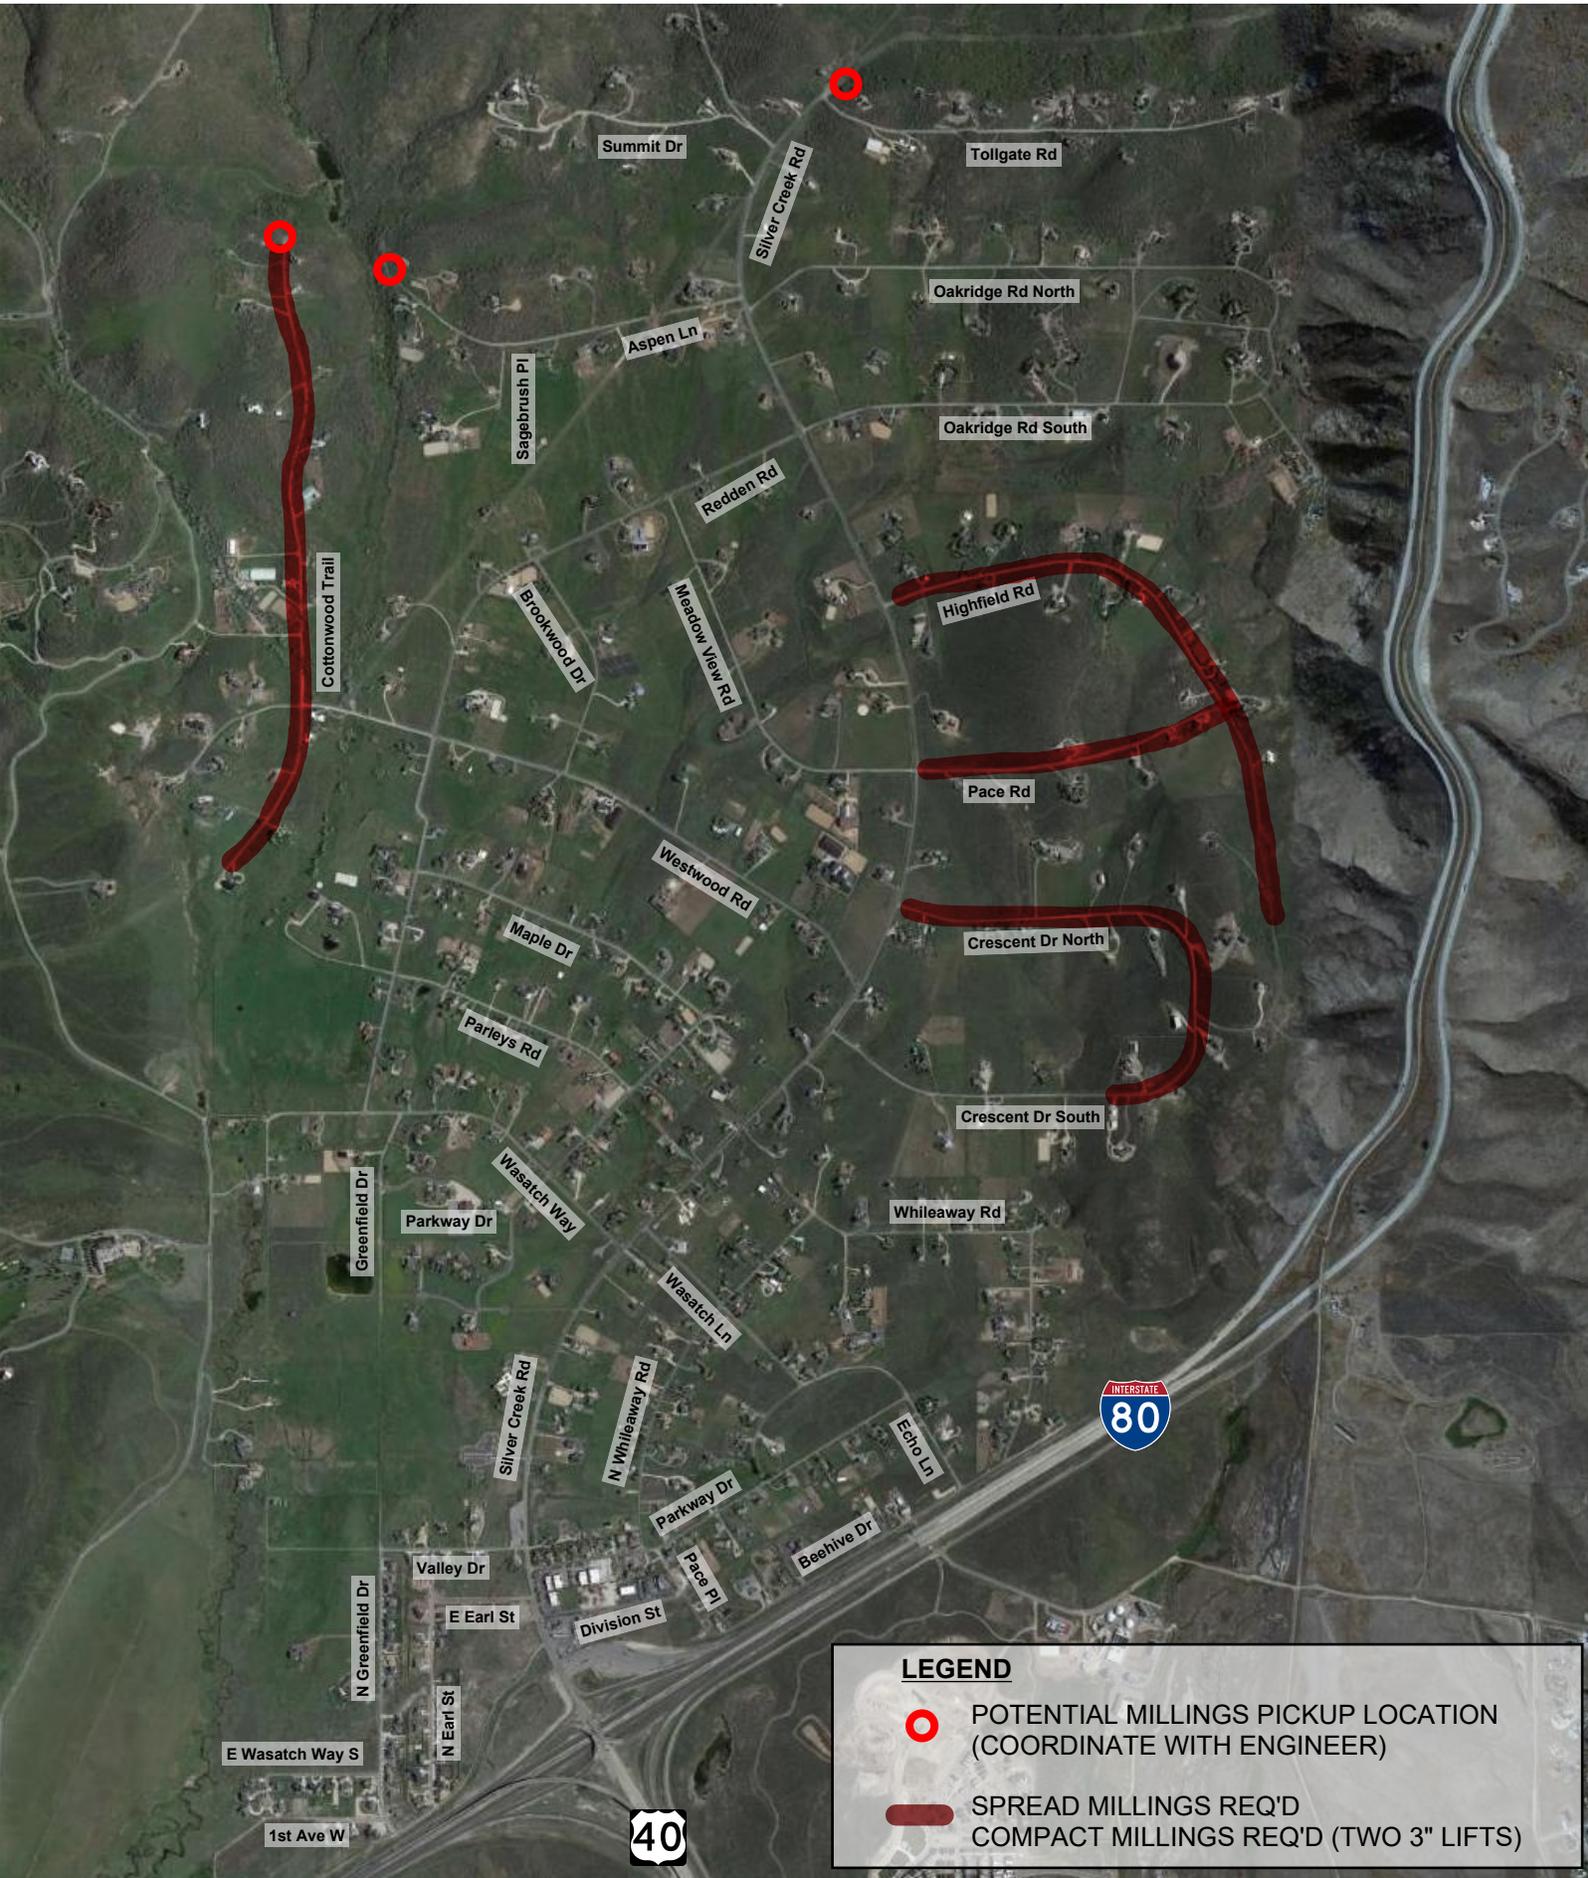

LEGEND

-  POTENTIAL MILLINGS PICKUP LOCATION (COORDINATE WITH ENGINEER)
-  SPREAD MILLINGS REQ'D
COMPACT MILLINGS REQ'D (TWO 3" LIFTS)

PROJECT MAP

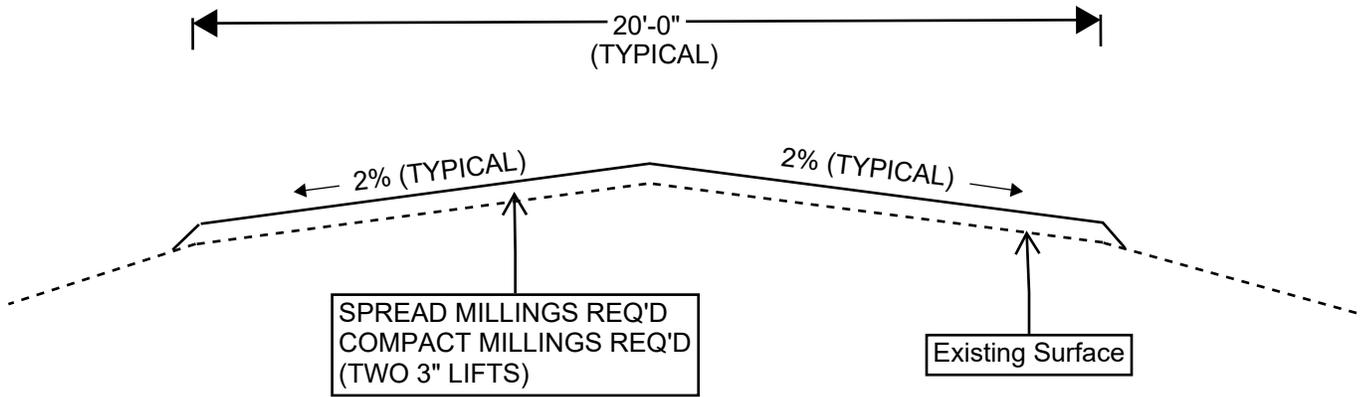

Cross Section