


## PARTS LIST / DESCRIPTION

- ① THD x THD BRASS STOP & WASTE VALVE
- ② SCH 80 GALV STEEL 90° BEND (THD x THD)
- ③ THD x THD
- ④ VALVE BOX, 2 PIECE, CAST IRON, SCREW ADJUSTABLE SLEEVE, 5-1/4" SHAFT, WITH A DROP LID. LID TO BE MARKED "IRRIGATION"
- ⑤ REDUCED PRESSURE ZONE BACKFLOW ASSEMBLY
- ⑥ SCH 80 GALV STEEL UNION

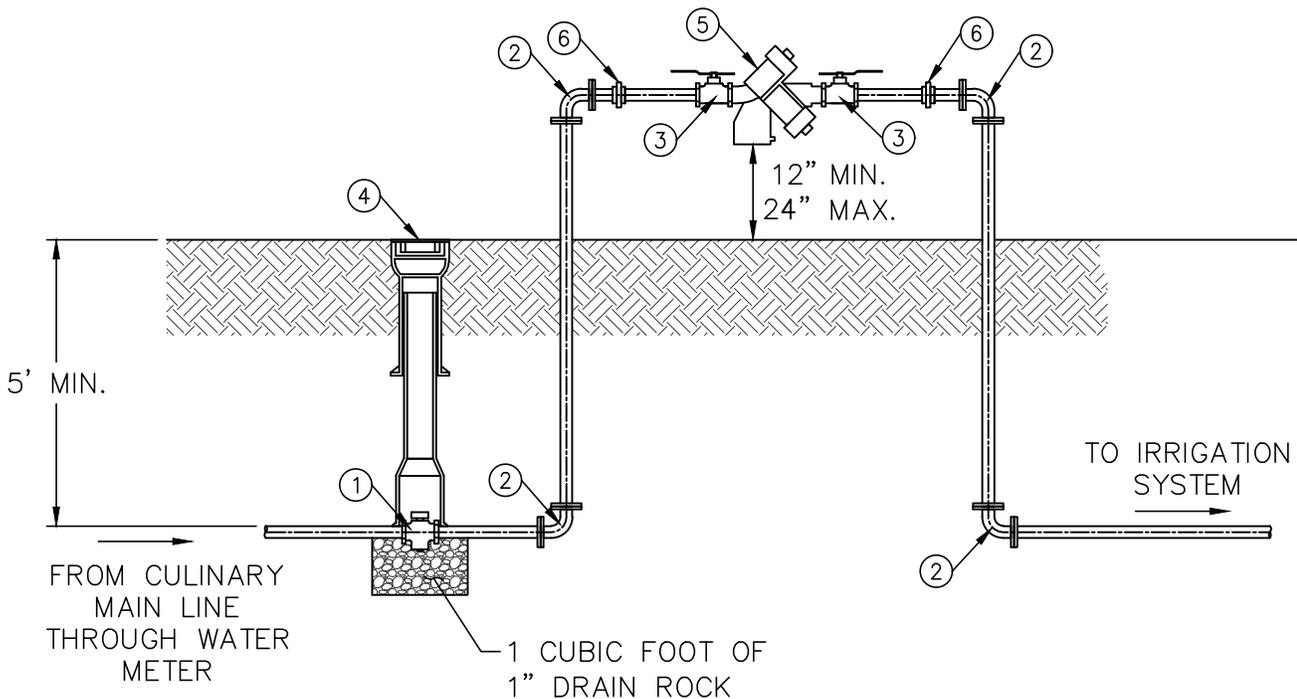

**NOTE:**

BACKFLOW ASSEMBLY SHALL BE TESTED WITHIN 10 DAYS AFTER INSTALLATION AND ANNUALLY EVERY YEAR AFTER. RESULTS SHALL BE SUBMITTED TO THE DISTRICT FOR APPROVAL.

SCSA#3

DRAWN BY:

CHECKED BY:

REV. DATE:

TYP. 3/4" TO 2" REDUCED PRESSURE  
BACKFLOW PREVENTER INSTALLATION